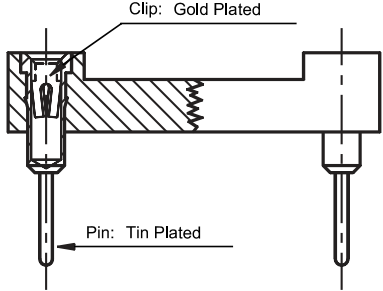


T04 Series


0.100 Centerline Dual-In-Line Round Pin IC Socket

T04 Series/IC SOCKET

Specifications	Feature	
Storage Temperature: -20 ~ 70°C	Clip accepts 0.017"(0.43mm) to 0.02"(0.50mm) Diameter Round Leads	
Operating Temperature: 0 ~ 85°C	Insulator: PBT with glass fiber (UL 94V-0)	
Current Rating: 3A/Contact Max.	Contact pin: Brass Alloy, 150u" Tin plating over 30u" to 50u" Nickel	
Contact Resistance: 20 mΩ Max.(initial)	Contact clip: Beryllium Copper, 118u" Gold plating over 30u" to 50u" Nickel	
Insulation Resistance: 1000 MΩ Min.	4-finger mating contacts open frame structure	
Dielectric withstanding voltage: 500V ACrms per minute	Stackable end-to-end and side-to-side	
Insertion force: 270g Max. Retention force: 90g Min.	Polarization mark	

RoHS Compliant

T04 Series/IC SOCKET

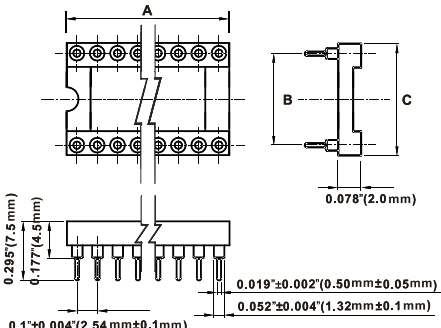Part Number	No. of Contacts	Spacing in inch (mm)	Dimensions in inch(mm)			Contact Plating	Diagram
			A	B	C		
T04-06	6	0.300(7.62)	0.300(7.62)	0.300(7.62)	0.400(10.16)	Tin	
T04-08	8		0.400(10.16)	0.300(7.62)	0.400(10.16)		
T04-14	14		0.700(17.78)	0.300(7.62)	0.400(10.16)		
T04-16	16		0.800(20.32)	0.300(7.62)	0.400(10.16)		
T04-18	18		0.900(22.86)	0.300(7.62)	0.400(10.16)		
T04-20	20		1.00(25.40)	0.300(7.62)	0.400(10.16)		
T04-24S	24S		1.20(30.48)	0.300(7.62)	0.400(10.16)		
T04-28S	28S		1.40(35.56)	0.300(7.62)	0.400(10.16)		
T04-24	24	0.600(15.24)	1.20(30.48)	0.600(15.24)	0.700(17.78)		
T04-28	28		1.40(35.56)	0.600(15.24)	0.700(17.78)		
T04-32	32		1.60(40.64)	0.600(15.24)	0.700(17.78)		
T04-40	40		2.00(50.80)	0.600(15.24)	0.700(17.78)		