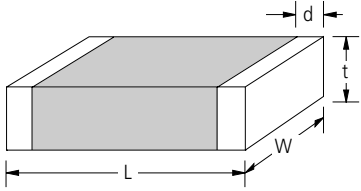


Specifications		Dimensions(mm)				Diagram of Dimensions
		L	W	T	d	
Standard	CBM0402	1.0±0.10	0.50±0.10	0.50±0.10	0.1~0.35	
	CBM0603	1.6±0.20	0.80±0.15	0.8±0.15	0.1~0.6	
	CBM0805	2.0±0.20	1.25±0.20	0.9±0.20	0.2~0.8	
	CBM1204	3.2±0.20	1.60±0.20	1.1±0.20	0.2~1.0	
	CBM1206	3.2±0.20	1.60±0.20	1.6±0.20	0.2~1.0	
	CBM1210	3.2±0.20	2.50±0.20	1.3±0.20	0.2~1.0	
	CBM1808	4.5±0.25	1.60±0.20	1.6±0.20	0.2~1.0	
	CBM1812	4.5±0.25	3.20±0.20	1.5±0.20	0.2~1.0	

Multilayer Chip Bead - 0805

RoHS

Chip CBM

Part Number	Size (inch)	Impedance. (Ω)	Tolerance	L Freq. (MHZ)	DCR Max. (Ω)	Rated Current Max. (mA)
CBM0805	0805	5	±25%	100	0.10	600
		7	±25%	100	0.10	600
		9	±25%	100	0.10	600
		10	±25%	100	0.10	600
		11	±25%	100	0.10	600
		12	±25%	100	0.10	600
		15	±25%	100	0.10	600
		17	±25%	100	0.10	600
		19	±25%	100	0.10	600
		22	±25%	100	0.10	600
		26	±25%	100	0.10	600
		28	±25%	100	0.10	600
		30	±25%	100	0.10	600
		31	±25%	100	0.10	600
		32	±25%	100	0.10	600
		33	±25%	100	0.10	500
		39	±25%	100	0.10	500
		40	±25%	100	0.10	500
		42	±25%	100	0.10	500
		47	±25%	100	0.10	500
		50	±25%	100	0.10	500
		52	±25%	100	0.15	500
		56	±25%	100	0.15	500
		60	±25%	100	0.15	500
		70	±25%	100	0.15	500
		75	±25%	100	0.15	500
		80	±25%	100	0.15	500
		90	±25%	100	0.15	500
		95	±25%	100	0.15	500
		100	±25%	100	0.25	300
		120	±25%	100	0.25	300
		150	±25%	100	0.25	300
		180	±25%	100	0.30	300
		200	±25%	100	0.30	300
		220	±25%	100	0.30	300
		240	±25%	100	0.30	300
		300	±25%	100	0.30	300
		330	±25%	100	0.30	300
		400	±25%	100	0.30	300
		420	±25%	100	0.30	300
		430	±25%	100	0.40	300
		450	±25%	100	0.40	300
		470	±25%	100	0.40	300
		500	±25%	100	0.40	300
		600	±25%	100	0.40	300

Part Number	Size (inch)	Impedance. (Ω)	Tolerance	L Freq. (MHZ)	DCR Max. (Ω)	Rated Current Max. (mA)
CBM0805	0805	680	$\pm 25\%$	100	0.40	300
		750	$\pm 25\%$	100	0.50	200
		1000	$\pm 25\%$	100	0.50	200
		1200	$\pm 25\%$	100	0.60	200
		1500	$\pm 25\%$	100	0.60	200
		2000	$\pm 25\%$	100	0.70	200
		2200	$\pm 25\%$	100	0.70	200
		2500	$\pm 25\%$	100	0.70	200
		2700	$\pm 25\%$	100	0.70	200